



GAMCO HI-LOAD SHORING




SAFE WORKING LOAD PER LEG

GAMCO 10K SHORING FRAMES		
WIDTH	HEIGHT	WEIGHT (lbs)
48"	36"	34
48"	48"	46
48"	60"	54
48"	72"	67


GAMCO HI-LOAD SHORING LOAD CHART												
HI-LOAD FRAME	SAFE WORKING LOAD PER LEG (LBS) FOS = 2.5:1											
4' W x 3' H 4' W x 4' H	TOTAL SCREWJACK EXTENSION (TOP + BOTTOM) MUST BE EQUAL	12"	17,500	16,600	13,400	10,600	10,200	10,000	9,900	9,800	9,700	9,600
		24"	14,600	13,700	11,900	9,500	9,100	8,700	8,600	8,500	8,400	8,300
		36"	12,200	11,200	10,400	8,300	8,800	7,700	7,300	7,000	6,750	6,500
		48"	10,500	10,300	9,750	8,000	7,700	7,400	7,200	7,000	6,750	6,500
4' W x 5' H		12"	15,800	14,900	13,400	10,600	10,200	10,000	9,900	9,800	9,700	9,600
		24"	14,100	12,400	11,900	9,500	9,100	8,700	8,600	8,500	8,400	8,300
		36"	11,700	10,700	10,400	8,300	8,000	7,700	7,300	7,000	6,750	6,500
		48"	10,200	10,000	9,750	8,000	7,700	7,400	7,200	7,000	6,750	6,500
4' W x 6' H		12"	14,400	13,200	11,600	10,600	10,200	10,000	9,900	9,800	9,700	9,600
		24"	12,400	11,100	10,800	9,500	9,100	8,700	8,600	8,500	8,400	8,300
		36"	10,000	9,000	8,600	8,300	8,000	7,700	7,300	7,000	6,750	6,500
		48"	8,500	8,400	8,200	8,000	7,700	7,400	7,200	7,000	6,750	6,500
NO. OF TIERS			1	2	3	4	5	6	7	8	9	10




10K SHORING CROSSBRACES

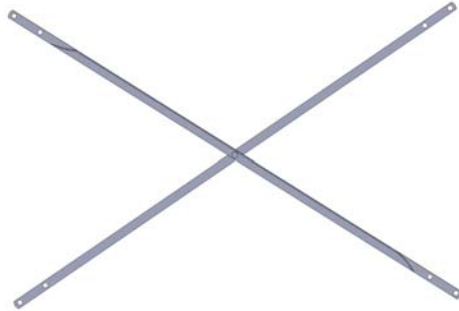


10K SHORING CROSSBRACES		
SIZE	WEIGHT	FOLDED LENGTH
4'	11#	69-3/8"
5'	13#	78-3/8"
6'	15#	88"
7'	17#	98-1/4"
8'	18#	108-7/8"
10'	22#	130-3/4"



10K BASEPLATE
8#

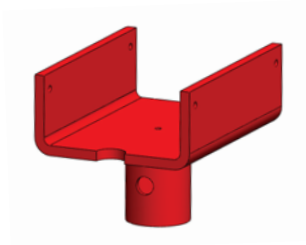


**10K U-HEAD
NARROW (5-1/2")**
8#

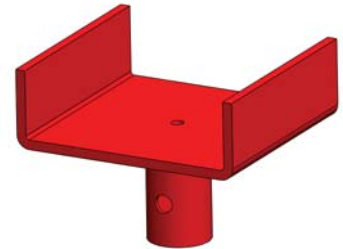

**10K U-HEAD
WIDE (8")**
12.5#



10K SCREWJACK
10.5#



10K CONNECTOR
1#



10K RIVET/PIN
.5#